



**ME4 Trench-Field Stop IGBT MODULE**

**CCGF600T120SD**

ME4 Trench-Field Stop IGBT MODULE

$V_{CES}$	$V_{CEsat}$		$I_{CN}/I_{CRM}$
1200V	$T_{vj}=25^{\circ}C@600A$	1.84V	600A/1200A
	$T_{vj}=150^{\circ}C@600A$	2.2V	



**DESCRIPTION**

CCGF600T120SD designed for a 150°C junction operation temperature, the module accommodates a Half bridge configuration of Trench-Field Stop IGBT and matching emitter controlled diodes and NTC.


**FEATURES**

- Increased Blocking Voltage Capability To 1200V
- Increased Dc Ink Voltage
- High Short Circuit Capability, Self Limiting Short Circuit Current
- High Current Density
- Trench IGBT
- $T_{vj\ op} = 150^{\circ}C$
- High Surge Current Capability
- High Power Density
- Integrated NTC temperature sensor
- Isolated Base Plate
- Copper Base Plate
- Standard Housing
- RoHS compliant
- AQG324 Qualified

**APPLICATIONS**

- Commercial Agriculture Vehicles
- Motor Drives
- Solar Applications
- UPS Systems

**EQUIVALENT CIRCUIT**

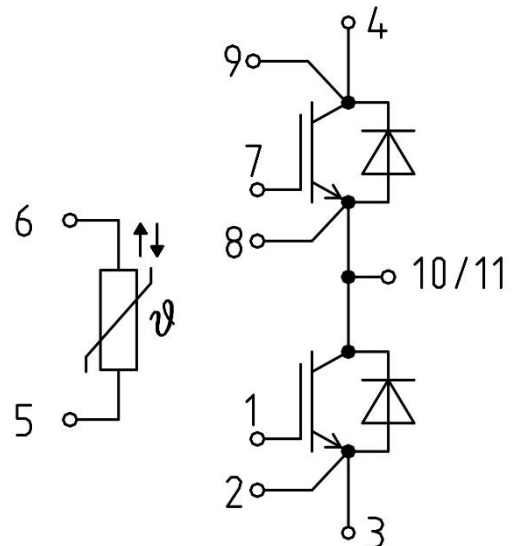

# CHARACTERISTICS VALUES

## MAXIMUM RATED VALUES(IGBT)

Parameter	Symbol	Conditions	Values	Units
Collector-emitter voltage	$V_{CES}$	$T_{vj}=25^{\circ}\text{C}$ , $V_{GE}=0\text{V}$	1200	V
Continuous collector current	$I_{CN}$	$T_C=100^{\circ}\text{C}$ , $T_{vj\text{max}}=175^{\circ}\text{C}$	600	A
Repetitive peak collector current	$I_{CRM}$	$t_p=1\text{ms}$ , $T_{vj}=25^{\circ}\text{C}$	1200	A
Gate-emitter peak voltage	$V_{GES}$	$T_{vj}=25^{\circ}\text{C}$	$\pm 30$	V
SC data	$I_{SC}$	$V_{GE}\leq 15\text{V}$ , $V_{CC}=800\text{V}$ $V_{CE\text{max}}=V_{CES}-L_{Sce} \cdot di/dt$ , $t_p\leq 10\mu\text{s}$ , $T_{vj}=150^{\circ}\text{C}$	2400	A
Total power dissipation	$P_{tot}$	$T_C=25^{\circ}\text{C}$ , $T_{vj\text{max}}=150^{\circ}\text{C}$	2604 <sup>1)</sup>	W

1) Verified by characterization / design not by test.

## CHARACTERISTICS VALUES(IGBT)

Parameter	Symbol	Conditions	Values			Units	
			Min.	Typ.	Max.		
Collector-emitter saturation voltage	$V_{CESat}$	$I_C=600\text{A}$ , $V_{GE}=15\text{V}$	$T_{vj}=25^{\circ}\text{C}$		1.84	2.35	V
			$T_{vj}=125^{\circ}\text{C}$		2.1		V
			$T_{vj}=150^{\circ}\text{C}$		2.2		V
Gate-emitter threshold voltage	$V_{GEth}$	$I_C=6.4\text{mA}$ , $V_{CE}=V_{GE}$	$T_{vj}=25^{\circ}\text{C}$	5	5.8	6.5	V
			$T_{vj}=150^{\circ}\text{C}$		4.2		V
Gate charge	$Q_G$	$V_{GE}=-8\text{V}/+15\text{V}$		7.1		$\mu\text{C}$	
Integrated gate resistor	$R_G$	$T_{vj}=25^{\circ}\text{C}$		2.9		$\Omega$	
Input capacitance	$C_{ies}$	$T_{vj}=25^{\circ}\text{C}$ $f=100\text{kHz}$ , $V_{CE}=25\text{V}$ , $V_{GE}=0\text{V}$		70.1		nF	
Output capacitance	$C_{oes}$	$T_{vj}=25^{\circ}\text{C}$ $f=100\text{kHz}$ , $V_{CE}=25\text{V}$ , $V_{GE}=0\text{V}$		2.7		nF	
Reverse transfer capacitance	$C_{res}$	$T_{vj}=25^{\circ}\text{C}$ , $f=100\text{kHz}$ , $V_{CE}=25\text{V}$ , $V_{GE}=0\text{V}$		0.6		nF	
Collector-emitter cut-off current	$I_{CES}$	$V_{CE}=1200\text{V}$ , $V_{GE}=0\text{V}$	$T_{vj}=25^{\circ}\text{C}$			1	mA
			$T_{vj}=150^{\circ}\text{C}$		4		mA
Gate-emitter leakage current	$I_{GES}$	$V_{CE}=0\text{V}$ , $V_{GE}=20\text{V}$ , $T_{vj}=25^{\circ}\text{C}$			400	nA	
Turn-on delay time	$t_{d\text{on}}$	$I_C=600\text{A}$ , $V_{CE}=600\text{V}$ , $V_{GE}=-8\text{V}/+15\text{V}$ , $R_{Gon}=2\Omega$ , $R_{Goff}=2\Omega$ , Inductive Load	$T_{vj}=25^{\circ}\text{C}$		0.19		$\mu\text{s}$
			$T_{vj}=125^{\circ}\text{C}$		0.21		$\mu\text{s}$
			$T_{vj}=150^{\circ}\text{C}$		0.22		$\mu\text{s}$
Rise time	$t_r$		$T_{vj}=25^{\circ}\text{C}$		0.09		$\mu\text{s}$
			$T_{vj}=125^{\circ}\text{C}$		0.09		$\mu\text{s}$
			$T_{vj}=150^{\circ}\text{C}$		0.09		$\mu\text{s}$
Turn-off delay time	$t_{d\text{off}}$		$T_{vj}=25^{\circ}\text{C}$		0.47		$\mu\text{s}$
			$T_{vj}=125^{\circ}\text{C}$		0.55		$\mu\text{s}$
			$T_{vj}=150^{\circ}\text{C}$		0.62		$\mu\text{s}$
Fall time	$t_f$	$T_{vj}=25^{\circ}\text{C}$		0.11		$\mu\text{s}$	
		$T_{vj}=125^{\circ}\text{C}$		0.12		$\mu\text{s}$	
		$T_{vj}=150^{\circ}\text{C}$		0.15		$\mu\text{s}$	

Turn-on energy loss per pulse	E <sub>on</sub>	I <sub>C</sub> =600A, V <sub>CE</sub> =600V, V <sub>GE</sub> =-8V/+15V, R <sub>Gon</sub> =2Ω, R <sub>Goff</sub> =2Ω, L <sub>S</sub> =35nH,	T <sub>vj</sub> =25°C	61	mJ
			T <sub>vj</sub> =125°C	81	mJ
			T <sub>vj</sub> =150°C	91.5	mJ
Turn-off energy loss per pulse	E <sub>off</sub>	di/dt=5500A/μs (T <sub>vj</sub> =150°C), du/dt=3300V/μs (T <sub>vj</sub> =150°C)	T <sub>vj</sub> =25°C	50.6	mJ
			T <sub>vj</sub> =125°C	75	mJ
			T <sub>vj</sub> =150°C	82.5	mJ
Thermal resistance, junction to case	R <sub>thJC</sub>	per IGBT		0.048	K/W

### MAXIMUM RATED VALUES(FRD)

Parameter	Symbol	Conditions	Values	Units	
Repetitive peak reverse voltage	V <sub>RRM</sub>	T <sub>vj</sub> =25°C	1200	V	
Continuous forward current	I <sub>FN</sub>	T <sub>C</sub> =100°C, T <sub>vj max</sub> =175°C	600	A	
Maximum repetitive forward current	I <sub>FRM</sub>	t <sub>p</sub> =1ms	1200	A	
I <sup>2</sup> t-value	I <sup>2</sup> t	V <sub>R</sub> =0V, t <sub>p</sub> =10ms	T <sub>vj</sub> =125°C	47500	A <sup>2</sup> s
			T <sub>vj</sub> =150°C	38000	

### CHARACTERISTICS VALUES(FRD)

Parameter	Symbol	Conditions	Values			Units
			Min.	Typ.	Max.	
Forward voltage	V <sub>F</sub>	I <sub>F</sub> =600A, V <sub>GE</sub> =0V	T <sub>vj</sub> =25°C	2.11		V
			T <sub>vj</sub> =125°C	2.17		V
			T <sub>vj</sub> =150°C	2.2		V
Peak reverse recovery current	I <sub>RM</sub>	I <sub>F</sub> =600A, V <sub>R</sub> =600V, V <sub>GE</sub> =-8V, di <sub>F</sub> /dt=5500A/μs (T <sub>vj</sub> =150°C)	T <sub>vj</sub> =25°C	530		A
			T <sub>vj</sub> =125°C	580		A
			T <sub>vj</sub> =150°C	625		A
Recovered charge	Q <sub>r</sub>	I <sub>F</sub> =600A, V <sub>R</sub> =600V, V <sub>GE</sub> =-8V, di <sub>F</sub> /dt=5500A/μs (T <sub>vj</sub> =150°C)	T <sub>vj</sub> =25°C	61		μC
			T <sub>vj</sub> =125°C	117		μC
			T <sub>vj</sub> =150°C	131		μC
Reverse recovery energy	E <sub>rec</sub>	I <sub>F</sub> =600A, V <sub>R</sub> =600V, V <sub>GE</sub> =-8V, di <sub>F</sub> /dt=5500A/μs (T <sub>vj</sub> =150°C)	T <sub>vj</sub> =25°C	25.6		mJ
			T <sub>vj</sub> =125°C	46.4		mJ
			T <sub>vj</sub> =150°C	58.6		mJ
Thermal resistance, junction to case	R <sub>thJC</sub>	per FRD		0.075	K/W	

### NTC-THERMISTOR

Parameter	Symbol	Conditions	Values			Units
			Min.	Typ.	Max.	
Rated resistance	R <sub>25</sub>	T <sub>C</sub> =25°C		5.0		kΩ
Deviation of R100	ΔR/R	T <sub>C</sub> =100°C, R <sub>100</sub> =493Ω	-3		3	%
Power dissipation	P <sub>25</sub>	T <sub>C</sub> =25°C			60	mW
B-value	B <sub>25/50</sub>	R <sub>2</sub> =R <sub>25</sub> exp[B <sub>25/50</sub> (1/T <sub>2</sub> -1/(298.15K))]		3375		K
B-value	B <sub>25/80</sub>	R <sub>2</sub> =R <sub>25</sub> exp[B <sub>25/80</sub> (1/T <sub>2</sub> -1/(298.15K))]		3411		K
B-value	B <sub>25/100</sub>	R <sub>2</sub> =R <sub>25</sub> exp[B <sub>25/100</sub> (1/T <sub>2</sub> -1/(298.15K))]		3433		K


## CHARACTERISTICS VALUES(MODULE)

Parameter	Symbol	Conditions	Values			Units
			Min.	Typ.	Max.	
Maximum junction temperature	$T_{vj\ max}$	-			150	°C
Temperature under switching conditions	$T_{vj\ op}$	-	-40		150	°C
Storage temperature	$T_{stg}$	-	-40		125	°C
Stray inductance module	$L_{sCE}$	-		22		nH
Module lead resistance, terminals-chip	$R_{CC'+EE'}$	Tvj=25°C, per switch		1		mΩ
Isolation test voltage	$V_{ISOL}$	RMS, f=50Hz, t=1min		2.5		kV
Creepage distance	ds	Terminal to heatsink		14.5		mm
		Terminal to terminal		13		mm
Clearance distance	da	Terminal to heatsink		12.5		mm
		Terminal to terminal		10		mm
Comperative tracking index	CTI	-	>200			-
Mounting torque for module mounting	M1	Screw M5	3	-	6	N·m
Terminal connection torque	M2	Screw M6	3	-	6	N·m
Internal isolation	-	Basic insulation (class1, IEC 61140)	Al <sub>2</sub> O <sub>3</sub>			-
Material of module baseplate	-	-	Cu+Ni			-
Dimensions	LxWxH	-	152.1x62x20.8			mm
Weight	G	-	338			g

# CHARACTERISTICS DIAGRAMS


**Output characteristic IGBT, Inverter(typical)**

$I_c=f(V_{CE}), V_{GE}=15V$

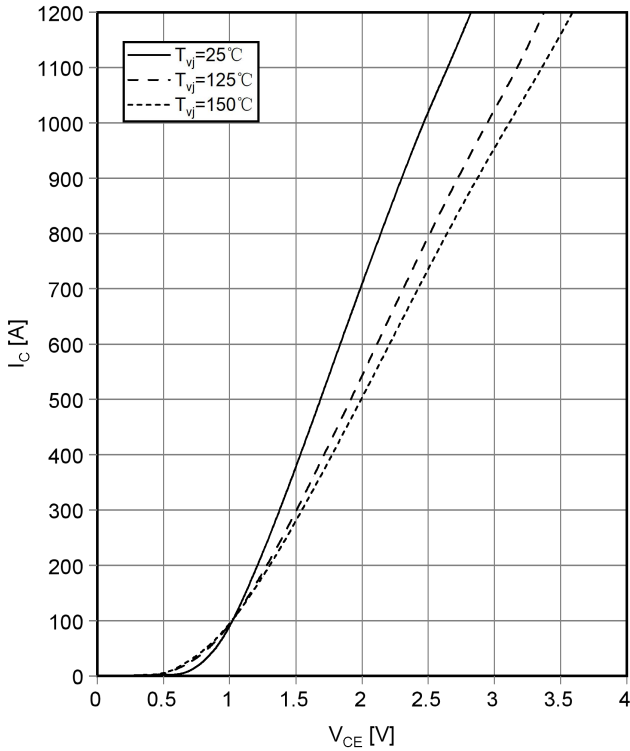


**Output characteristic IGBT, Inverter(typical)**

$I_c=f(V_{CE}), T_{vj}=150^\circ C$

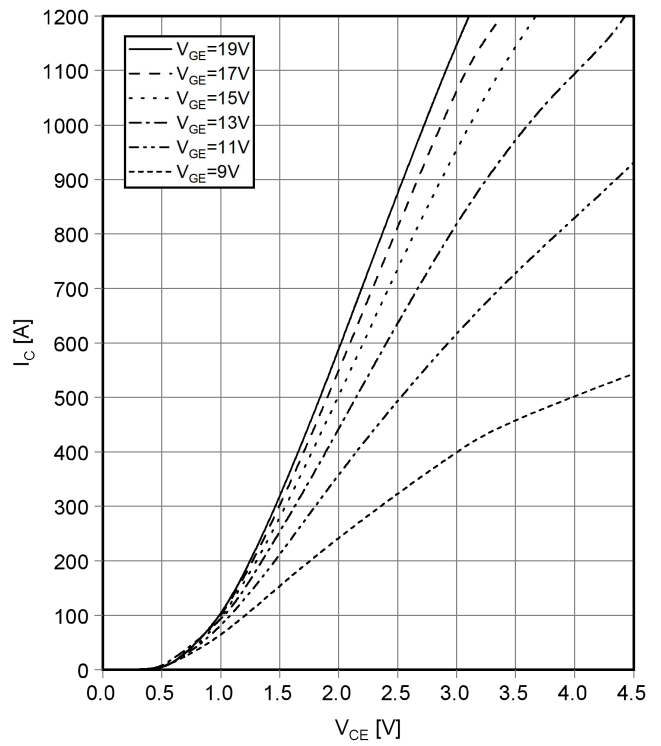


**Transfer characteristic IGBT, Inverter(typical)**

$I_c=f(V_{GE}), V_{CE}=20V$

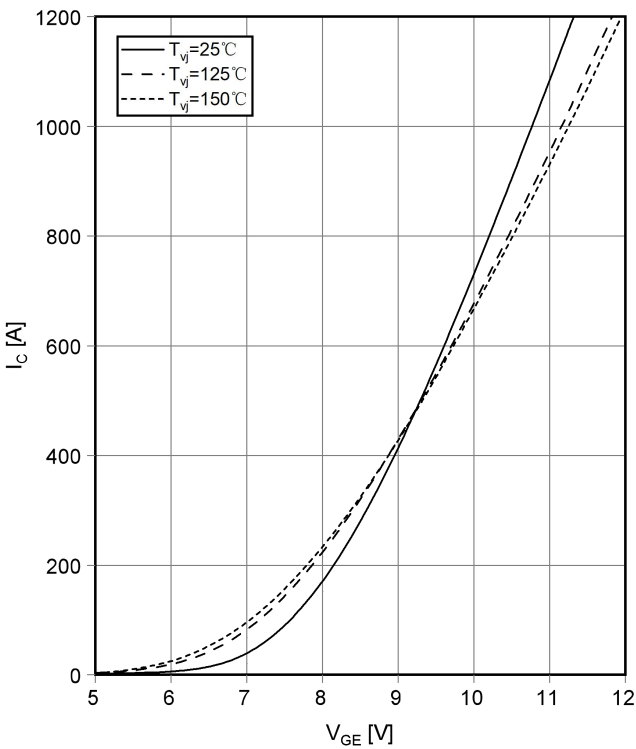


**Switching losses IGBT, Inverter(typical)**

$E_{on}=f(I_c), E_{off}=f(I_c), V_{GE}=15V, R_{Gon}=2\Omega, R_{Goff}=2\Omega, V_{CE}=600V$

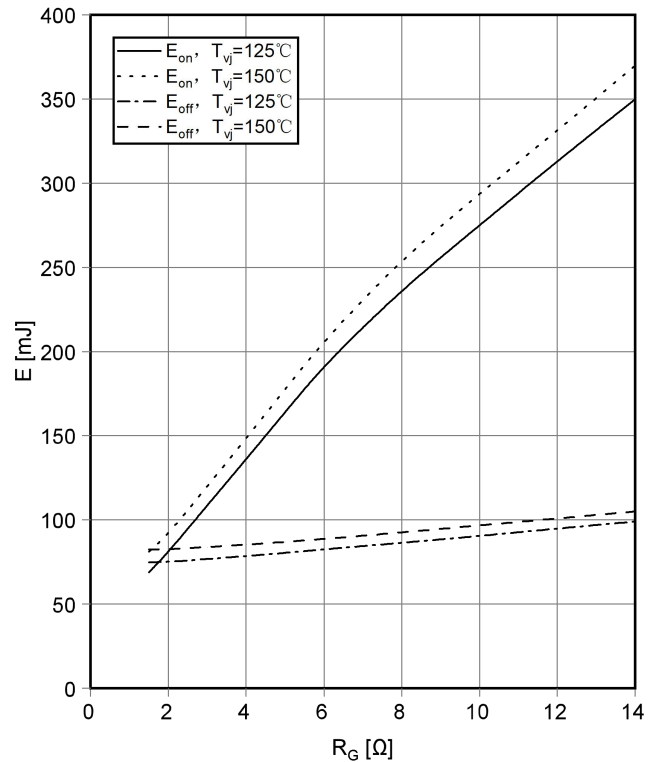


### Switching losses IGBT, Inverter(typical)

$E_{on}=f(R_G)$ ,  $E_{off}=f(R_G)$ ,  $V_{GE}=-8/+15V$ ,  $I_C=600A$ ,  $V_{CE}=600V$

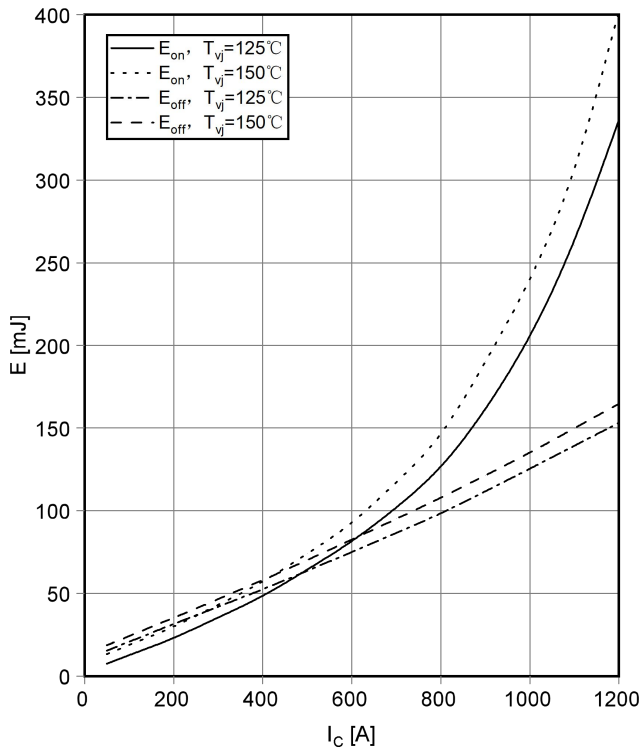


### Transient thermal impedance IGBT, Inverter

$Z_{thJC}=f(t)$

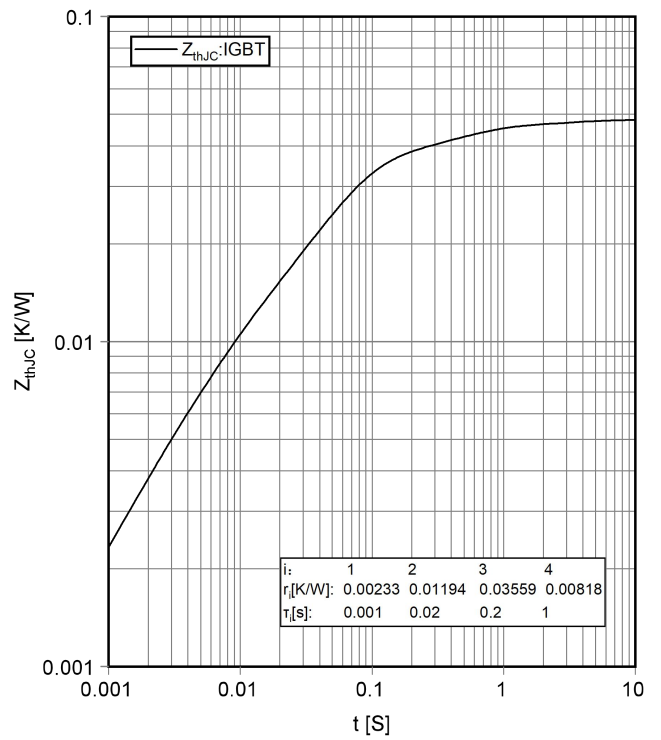


### Reverse bias safe operating area IGBT, Inverter(RBSOA)

$I_C=f(V_{CE})$ ,  $V_{GE}=15V$ ,  $R_{Goff}=2\Omega$ ,  $T_{vj}=150^\circ C$

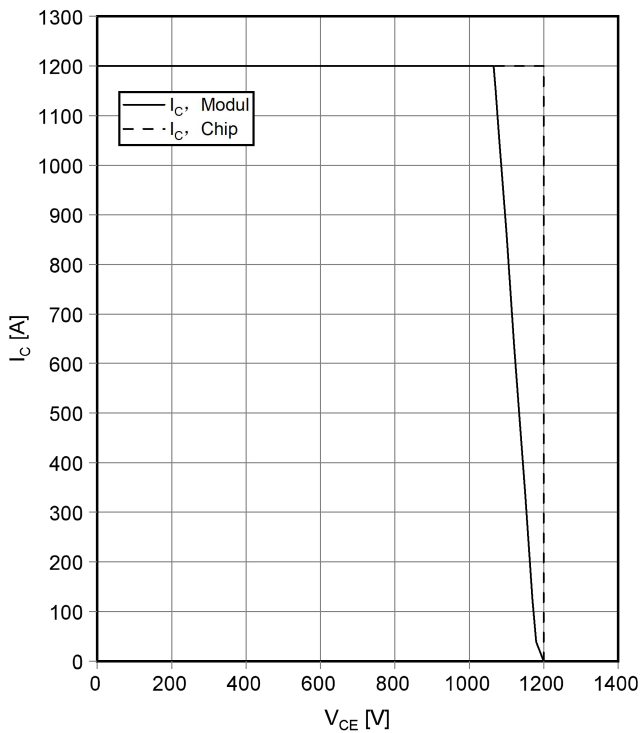


### Forward characteristic of FRD, Inverter(typical)

$I_F=f(V_F)$

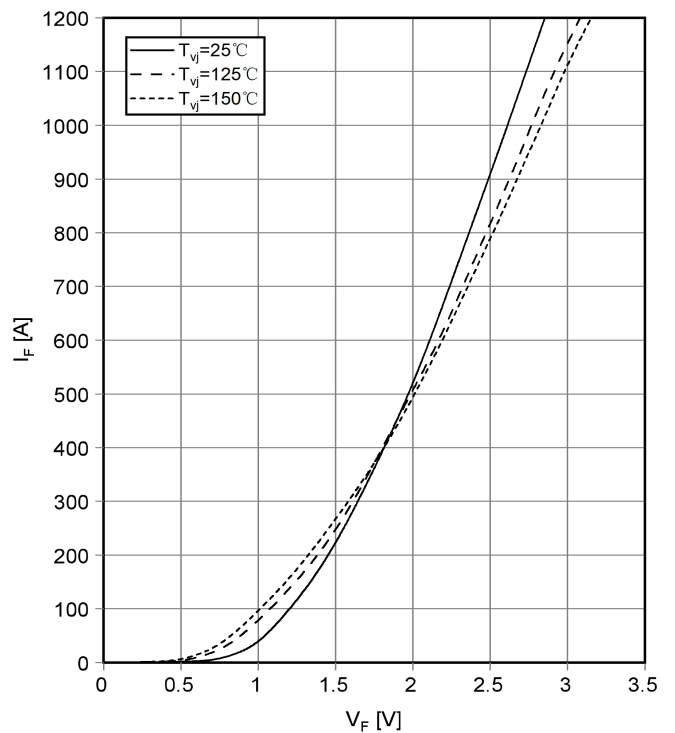


### Switching losses FRD, Inverter(typical)

$E_{rec}=f(I_F)$ ,  $R_{Gon}=2\Omega$ ,  $V_{CE}=600V$

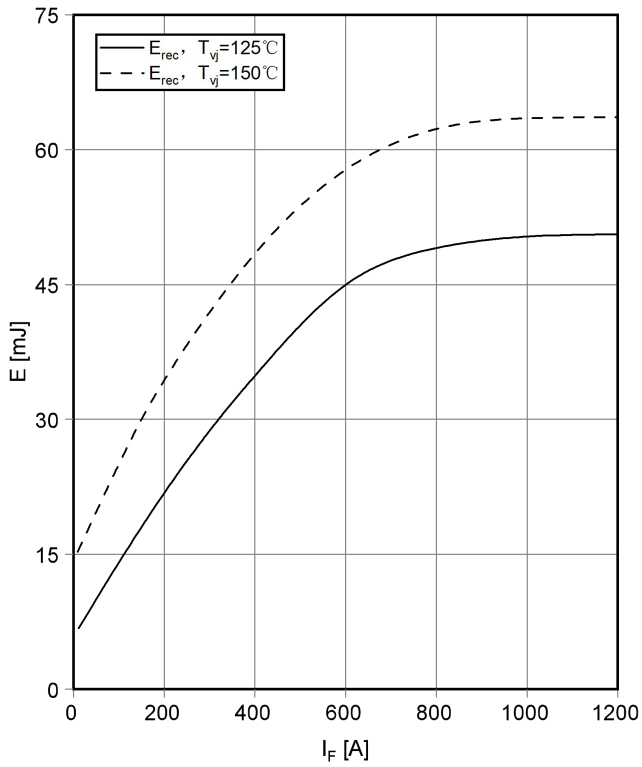


### Switching losses FRD, Inverter(typical)

$E_{rec}=f(R_G)$ ,  $I_F=600A$ ,  $V_{CE}=600V$

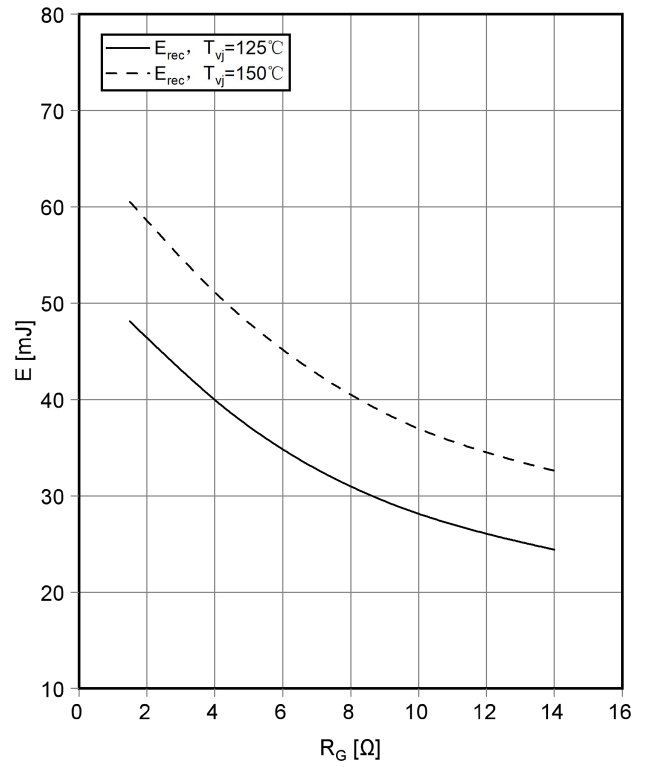


### Transient thermal impedance FRD, Inverter

$Z_{thJC}=f(t)$

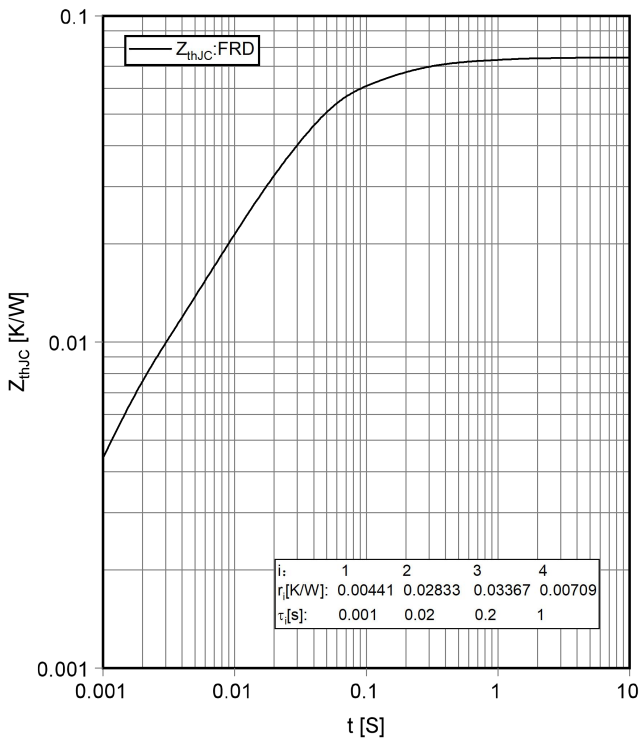


### NTC-Thermistor-temperature characteristic(typical)


$R=f(T)$

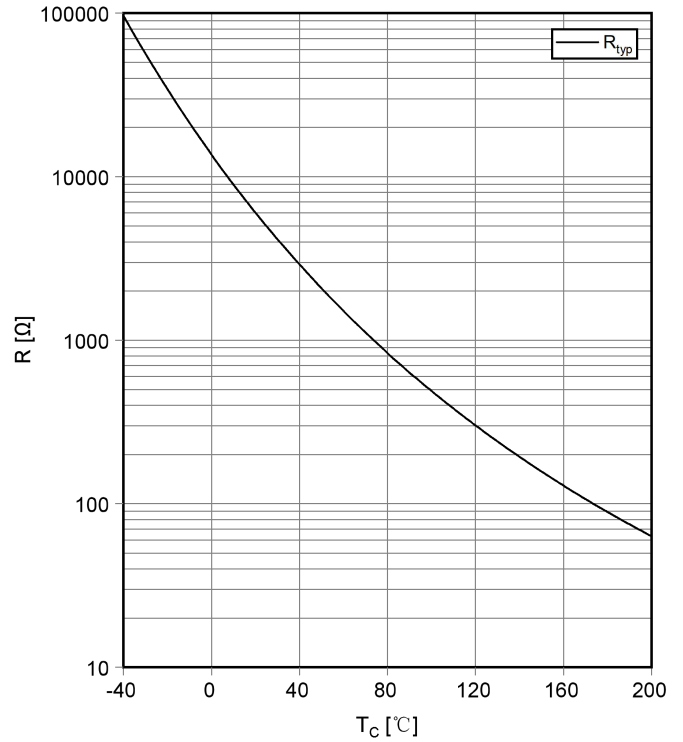

# CIRCUIT DIAGRAM

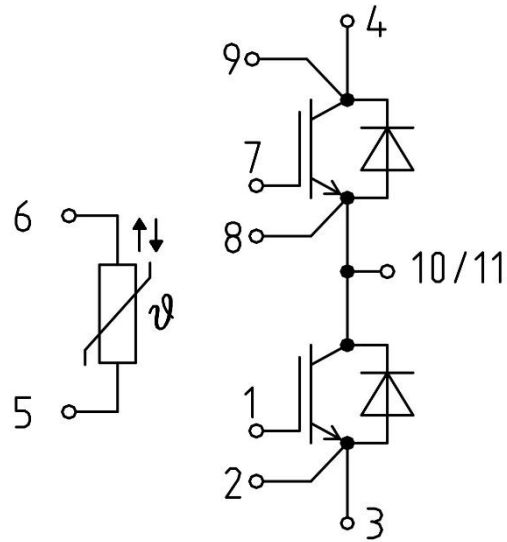

# PACKAGE OUTLINES

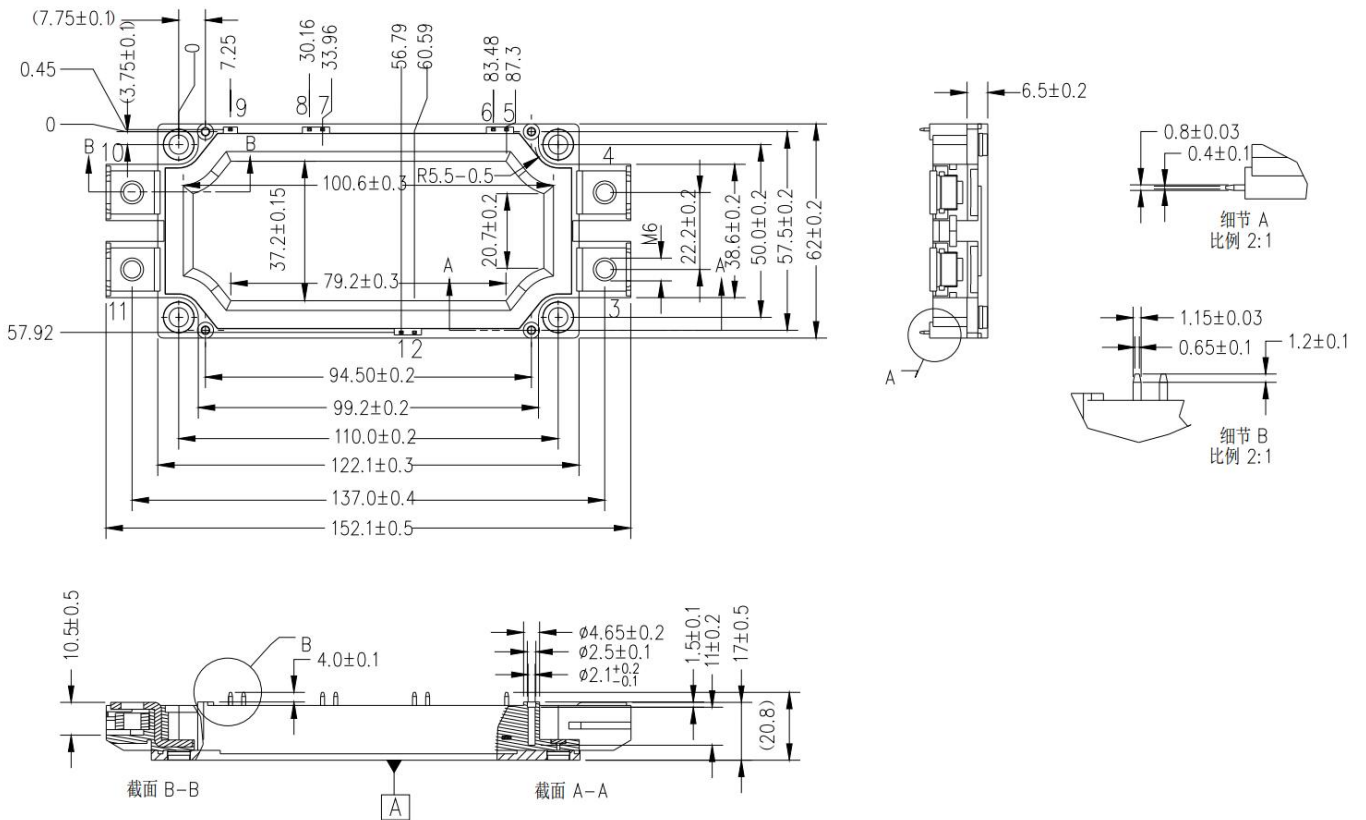



## NOTICE

Cloudchild reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Cloudchild does not assume any liability arising out of the application or use of any product described herein.

ChongQing Cloudchild Technology Co., Ltd. (short for Cloudchild) exerts the greatest possible effort to ensure high quality and reliability. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing Cloudchild products, to comply with the standards of safety in making a safe design for the entire system, including redundancy, fire-prevention measures, and malfunction prevention, to prevent any accidents, fires, or community damage that may ensue. In developing your designs, please ensure that Cloudchild products are used within specified operating ranges as set forth in the most recent Cloudchild products specifications.

Date of change	Rev #	revise content
2023/09/26	A/0	Initial releases